



Modelling of Rainfall Forecasting by Neuro-Fuzzy Method of Analalava-Port Berge Madagascar

F. RAJESITERA^{1*}, R. RANDRIANANTENAINA^{1, 2}, T. RANDRIAMAITSO³ and T. TOTOZAFINY¹

¹ Faculty of Technology and Environmental Sciences, Mahajanga University, Madagascar

² Laboratory of the Dynamics of the Atmosphere, Climate and Oceans (DyACO), Faculty of Sciences, University of Antananarivo, Madagascar

³ Institut Supérieur des Sciences et Technologies de Mahajanga, Université de Mahajanga, Bâtiment Ex-LOLO Mahajanga-be, Madagascar

Abstract: The study area is Analalava and Port Bergé, delimited in latitude between 15° South and 16° South and in longitude between 47° East and 48° East.

We modeled the rainfall from 1979 to 2018 using the Neuro-fuzzy method.

According to this method, on average the values of annual rainfall are between 23.90 mm and 48.54 mm. The year 1999 is the year with the least rainfall, the average annual rainfall value is 23.90 mm. The wettest year is 2007 with an average value of 48.54 mm.

Keywords: Rain, forecast, Neuro-fuzzy, Analalava-Port Bergé.

I. Introduction

The intensification of extreme climates is an emerging aspect of climate change that implies an urgent need to improve our understanding of the ecological and agronomic consequences [1]. Climate change is the cause of rainfall disruption. These upheavals will be accompanied by an increase in the frequency and intensity of extreme climatic events such as droughts, floods, heat waves, heavy and abundant rains, tornadoes... These climatic events, often at the origin of disasters, could produce more frequently in the future.

For this, prevention of climatic factors at the ecosystem level is a necessary approach, as it allows the conservation of biotic and abiotic processes involved in the functioning of the system [2] [3].

In Madagascar, the impact of climate change on rainfall remains a major concern for the island. It is likely to hit the whole country hard in the coming years, especially Analalava and Port Bergé. For this reason, this study leads us to model the annual mean rainfall value by the Neuro-Fuzzy method. In this respect, the proposal of a model for the medium-term forecast in a study area is one of the most important steps in the study.

II. Material and methods

2.1 Presentation of the study area

The study area (see Figure 1) is located between latitude 15°South and 16°South and longitude 47° East and 48° East

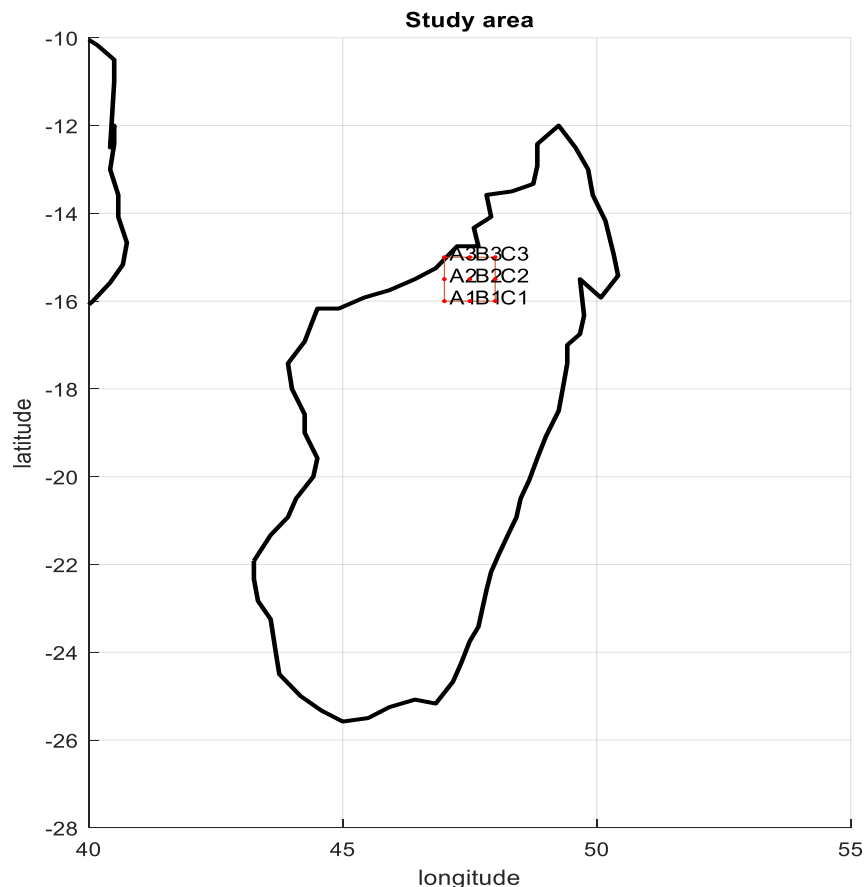


Figure 1: Study area $47^{\circ} \leq \text{longitude} \leq 48^{\circ}$ and $-16^{\circ} \leq \text{latitude} \leq -15^{\circ}$

2.2 Databases

The meteorological data we used are from the European Centre for Medium range Weather Forecasts (ECMWF) daily reanalysis experiment (ERA5) data at synoptic scale with a $0.5^{\circ} \times 0.5^{\circ}$ grid of rainfall over a time depth covering the period 1979-2018.

2.3 Neuro-fuzzy modelling

Definition: Neuro-fuzzy systems combine the advantages of two complementary techniques. Fuzzy systems provide a good knowledge representation.

The integration of neural networks within these systems improves their performance thanks to the learning capacity of neural networks. Conversely, the injection of fuzzy rules into neural networks, which are often criticised for their lack of readability, clarifies the meaning of the network parameters and facilitates their initialization, which represents a considerable saving in computation time for their identification.

The Neuro-Fuzzy system refers to the way of applying various learning techniques developed in the neural network literature to the fuzzy inference system.

In order to clarify the definitions, we propose in this chapter a brief presentation of some types of Neuro-fuzzy systems and a more detailed presentation of ANFIS.

2.3.1 Some types of neuro-fuzzy combination

There are several types for combining neural networks and fuzzy systems. These types can be classified into functional and structural, depending on their architecture and the research configuration between the fuzzy inference system and the neural networks.

2.3.2 Cooperative and concurrent neuro-fuzzy systems [4] [5] [6]

A cooperative neuro-fuzzy system can be considered as a preprocessor where the learning mechanism of artificial neural networks (ANNs) determines the fuzzy inference system (FIS) membership functions or fuzzy rules from the training data. Once the FIS parameters are determined, ANN goes to the bottom. The based rule is usually determined by a fuzzy clustering algorithm. The membership functions are usually approximated from RNA by the training data.

In a concurrent neuro-fuzzy system, RNA helps the RIS continuously to determine the required parameters especially if the input variables of the controller cannot be measured directly. In some cases the outputs of RIS may not be directly applicable to the process. Figures 2 and 3 represent the cooperative and concurrent Neuro-Fuzzy models.

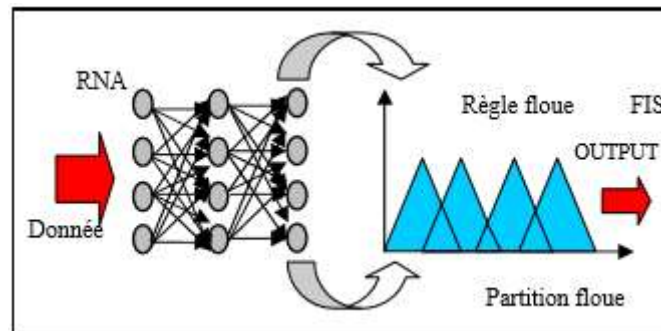


Figure 2: Cooperative neuro-fuzzy system

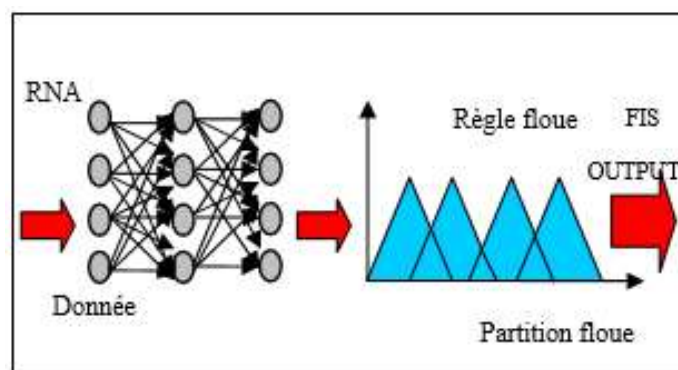


Figure 3: Competing neuro-fuzzy system

2.3.3 Fused neuro-fuzzy systems

In a fused neuro-fuzzy architecture, RNAs are used to determine the parameters of RIS. Fused Neuro-fuzzy systems share data structures and knowledge representation. A usual way to apply a learning algorithm to a fuzzy system is to represent it in a special architecture.

2.3.4 Falcon (Fuzzy Adaptive Learning Control Network) [7]

Falcon has a five-layer architecture, as shown in Figure 4.

There are two neurons for each output variable. One for the training data (desired output) and the other is for the output of FALCON. The first hidden layer is used to fuzzify the input variables. Each neuron in this layer represents a fuzzy set membership function. The second hidden layer defines the antecedent parts of the fuzzy rules followed by the consequence parts of the rules in the third hidden layer. FALCON uses a hybrid learning algorithm involving unsupervised learning to locate membership functions and initial rule bases and supervised learning to optimize the adjustment of the FM parameters to generate the desired outputs.

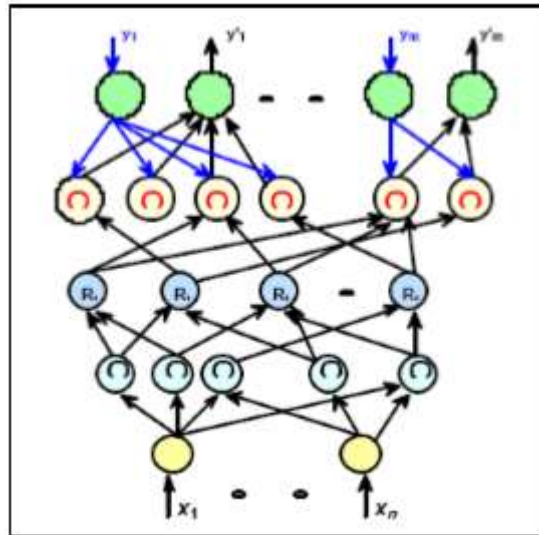


Figure 4: Architecture of FALCON

2.3.5 NEFCON (NEuro-Fuzzy CONTROL) [8]

NEFCON is designed to implement the Mamdani type fuzzy inference system. It consists of two layers whose weights are the fuzzy sets and the fuzzy rules. With the same assumed prior use shared weights, which are represented by ellipses drawn around the connections. They ensure the integrity of the rule base. The input layer provides the task of the fuzzification interface, the inference logic is represented by the propagation functions, and the output layer is the defuzzification interface. The learning of the NEFCON model is based on a mixture of unsupervised and supervised learning (back-propagation). NEFCON can be used to learn initial rules, if no system knowledge is available or even to optimize a manually defined rule base.

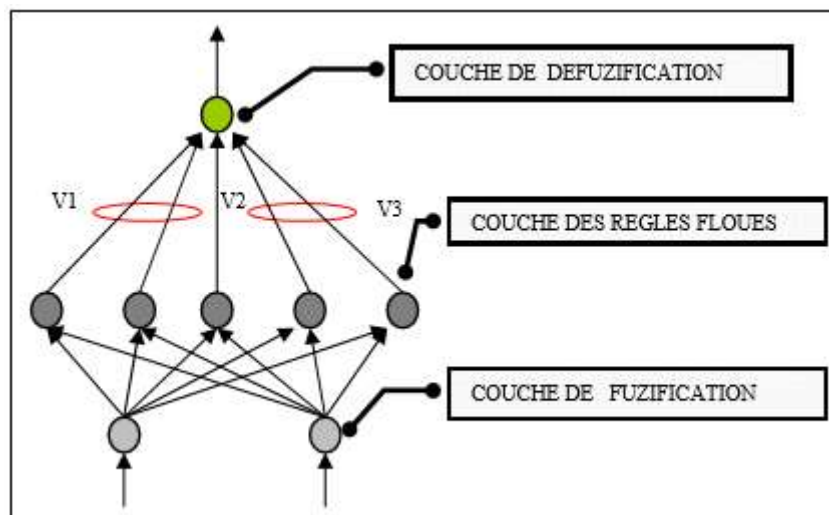


Figure 5: Architecture of NEFCON

2.3.6 ANFIS model

2.3.6.1 Architecture of ANFIS [9] [10] [11]

ANFIS (Adaptive Network Based Fuzzy Inference System) is a neuro-fuzzy adaptive inference system that consists of using a 5-layer MLP neural network for which each layer corresponds to the realization of a step of a Takagi Sugeno type fuzzy inference system. For simplicity, we assume that the fuzzy inference system has two inputs x and y , and one output f . Assume that the rule base contains two Takagi-Sugeno fuzzy rules.

$$\text{Rule1: if } (x \text{ is } A_1) \text{ and } (y \text{ is } B_1) \text{ then } (f_1 = p_1x + q_1y + r_1) \quad (1)$$

$$\text{Rule2: if } (x \text{ is } A_2) \text{ and } (y \text{ is } B_2) \text{ then } (f_2 = p_2x + q_2y + r_2) \quad (2)$$

ANFIS has a five-layer architecture as shown in Figure 6.

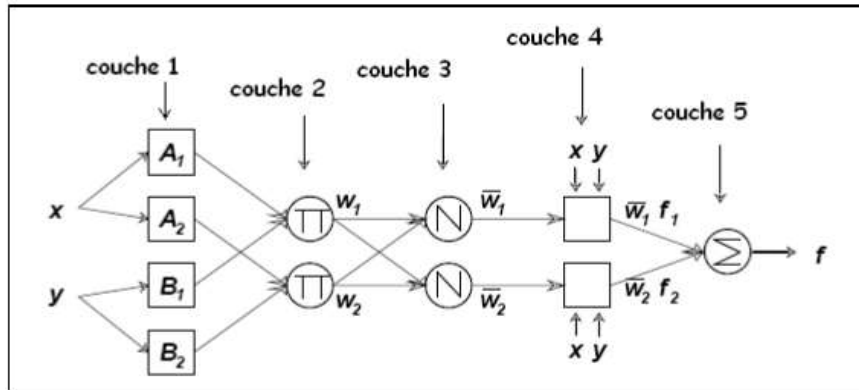


Figure 6: Architecture of ANFIS

A typical architecture can be described as follows:

1. The first layer of an ANFIS architecture has as many neurons as there are fuzzy subsets in the represented inference system. Each neuron calculates the truth degree of a particular fuzzy subset by its transfer function. The only restriction on the choice of this function concerns its derivability. In the literature, Gaussian functions are used and the modifiable parameters are the center and the slope of the Gaussian (variance).

The activation function of the neurons i of the first layer:

$$f_i^1 = \mu_{A_i}(X) \quad (3)$$

Where x is the input to neuron i , and A_i is a fuzzy subset corresponding to variable x . In other words, f_i^1 is the membership function of A_i and it indicates the degree to which given x satisfies the quantifier A_i . We choose $\mu_{A_i}(X)$ to be (Gaussian, triangle, trapezoidal) shaped with maximum equal to 1 and minimum equal to 0, such that the generalized functions of these shapes is:

$$\text{Triangle: } \mu(x) = \max(\min(\frac{x-a}{b-a}, \frac{c-x}{c-b}), 0) \quad (4)$$

$$\text{trapezoidal: } \mu(x) = \max(\min(\frac{x-a}{b-a}, 1, \frac{d-x}{d-c}), 0) \quad (5)$$

$$\text{Gaussian: } \mu(x) = \exp\left(-\frac{(x-c)^2}{\sigma^2}\right) \quad (6)$$

Where $\{a, b, c, \sigma\}$ is the set of parameters. As the values of these parameters change, the functions in the previous form change accordingly, thus presenting various forms of membership function on the linguistic variable A_i . The parameters in this layer are referred to as membership function parameters.

2. The second hidden layer is used to calculate the degree of activation of the premises. The neurons in this layer each represent the premise of a rule. They receive as input the degree of truth of the different fuzzy subsets composing this premise and are in charge of computing its own degree of truth. The activation functions used for these neurons depend on the operators present in the rules (AND or OR).

The activation function of the neurons i of the first layer:

$$W_k = \mu_{Ai}(X) * \mu_{Bj}(Y) \quad (7)$$

Where k: represents the number of rules, i: represents the number of partitions of x, and j: the number of partitions of y.

3. The third hidden layer normalizes the degree of rule activation. Each neuron in this layer is a circle neuron denoted N. The i^{th} neuron calculates the ratio between i^{th} rule weight and the sum of all rule weights. This operation is called weight normalization.

$$\overline{W}_k = \frac{W_k}{\sum W_i} \quad (8)$$

The set of outputs from this layer will be called the normalized weights.

4. The fourth hidden layer is used to determine the parameters of the consequence part of the rules (p, q, r). The function of each neuron in this layer is as follows

$$f_k^4 = \overline{W}_k * f_k = \overline{W}_k(p_k x + p_k y + r_k) \quad (9)$$

Where W_k is the output of the third layer, and $\{r_i, q_i, p_i\}$ is the set of parameters. These parameters are referred to as the consequential parameters.

5. The output layer contains a single neuron in this layer, is a circle neuron denoted S which calculates the overall output as the sum of all incoming signals, that's to say:

$$f^5 = \sum_k \overline{W}_k * f_k^4 \quad (10)$$

Figure 7 shows an ANFIS system, with 2 inputs each divided into three fuzzy subsets and 9 rules.

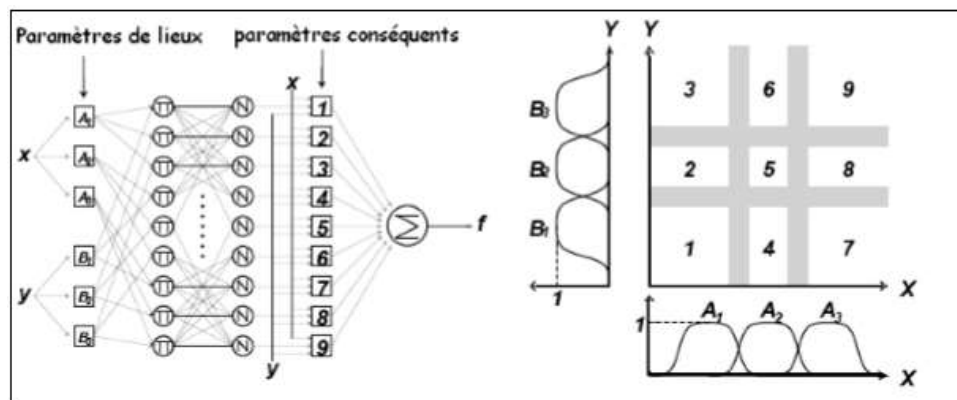


Figure 7: Example ANFIS with 2 inputs and 9 rules

Table 1: Different layers of an ANFIS system

Different layers	Type of the layers	Number of neurons in the layer
Layer 0	Inputs	n
Layer 1	Values	(p. n)
Layer 2	Rules	p^n
Layer 3	Normalization	p^n
Layer 4	Linearization of the functions	p^n
Layer 5	Sum	1

Such that:

n: the number of inputs.

p: the number of fuzzy input subsets (fuzzy partition).

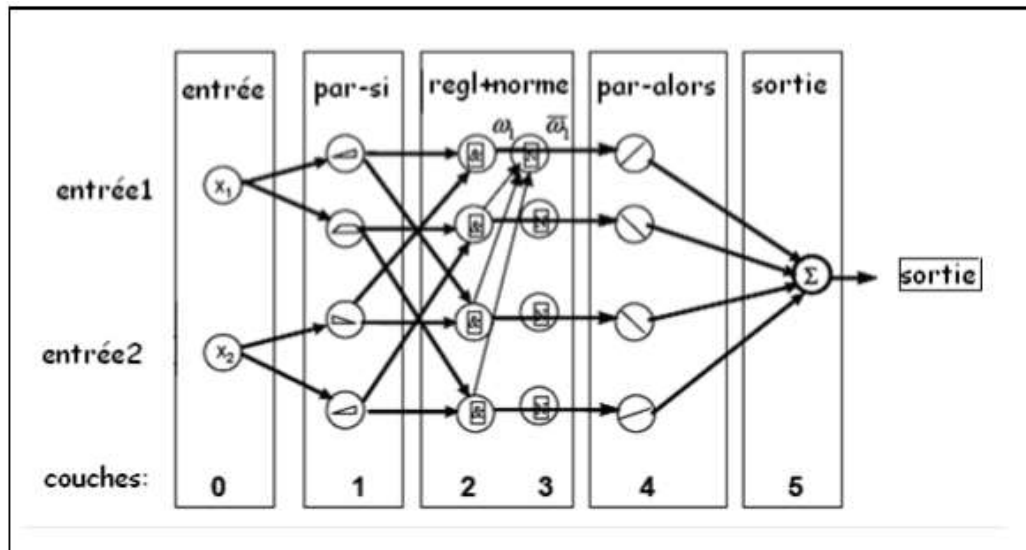


Figure 8: ANFIS network

Note that neurons in ANFIS have different structures:

- Values [membership function defined by different forms];
- Rules [usually product];
- Normalization [sum and arithmetic division];
- Functions [linear regressions and multiplication with \bar{w} , such that \bar{w} is the normalisation of the weight w];
- Output [Algebraic Sum].

3.3.7 ANFIS learning algorithm

ANFIS applies the learning mechanism of neural networks to fuzzy inference techniques. In other words, ANFIS is a fuzzy inference system (FIS) whose membership function parameters are adjusted using the back-propagation learning algorithm, or in combination with another type of algorithm such as least square.

In the ANFIS architecture proposed in Figure 6, the overall output can be expressed as linear combinations of the resulting parameters. More precisely, the conclusion (the output) in Figure 6 can be rewritten as:

$$f = \frac{w_1}{w_1 + w_2} f_1 + \frac{w_2}{w_1 + w_2} f_2$$

$$= (\bar{w}_1 x) p_1 + (\bar{w}_1 y) q_1 + (\bar{w}_1) r_1 + (\bar{w}_2 x) p_2 + (\bar{w}_2 y) q_2 + (\bar{w}_2) r_2 \quad (11)$$

The output is a linear function of the consequence parameters (p, q, r). ANFIS is a parametric representation of two sets of parameters: S1 and S2 such that:

- S1 represents the parameters of the fuzzy sets used for fuzzification in the first ANFIS layer

$$S1 = \left\{ \{a_{11}, b_{11}, c_{11}\}, \{a_{12}, b_{12}, c_{12}\}, \dots, \{a_{1p}, b_{1p}, c_{1p}\}, \dots, \{a_{np}, b_{np}, c_{np}\} \right\} \quad (12)$$

Where p is the number of fuzzy partitions of each of the input variables and n is the number of input variables.

- S2 represents the coefficients of the linear functions (the consequent parameters)

$$S2 = \{p_1, p_2, p_3 \dots, q_1, q_2, q_3 \dots, r_1, r_2, r_3 \dots\} \quad (13)$$

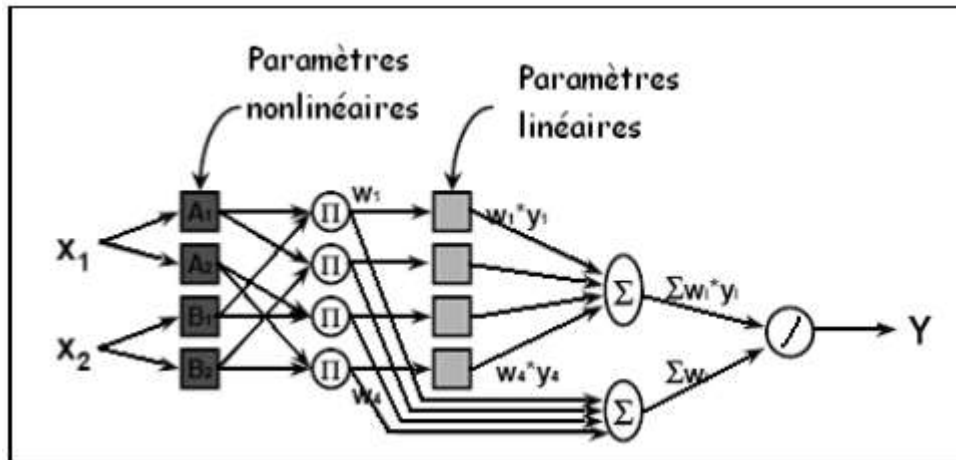


Figure 9: Hybrid learning method

Table 2: Parameters to be adjusted of an ANFIS system

	Passage Forward	Passage Backward
Membership function parameter (non linear a_i, b_i, c_i)	fixed	Retro propagation
Coefficient parameter (Linear p, q, r)	least squares	fixed

ANFIS uses a two-pass learning cycle:

- the forward run: S1 is fixed and S2 is calculated using the least square error (LSE) algorithm; (The LSE is applied only once when starting to obtain the initial values of the resulting parameters)
- backtracking: S2 is fixed and S1 is calculated using the Backpropagation algorithm.

III. Results and discussion

3.2.5 Graphical representation of the model

Figures 10 and 11 show the forecasts of the average annual rainfall observed during the study period. The curves of the observation data in blue, those in black the model and the curves in purple are the forecasts. The forecast values of the annual average rainfall for the years 2019 to 2028 are shown in Table 3.

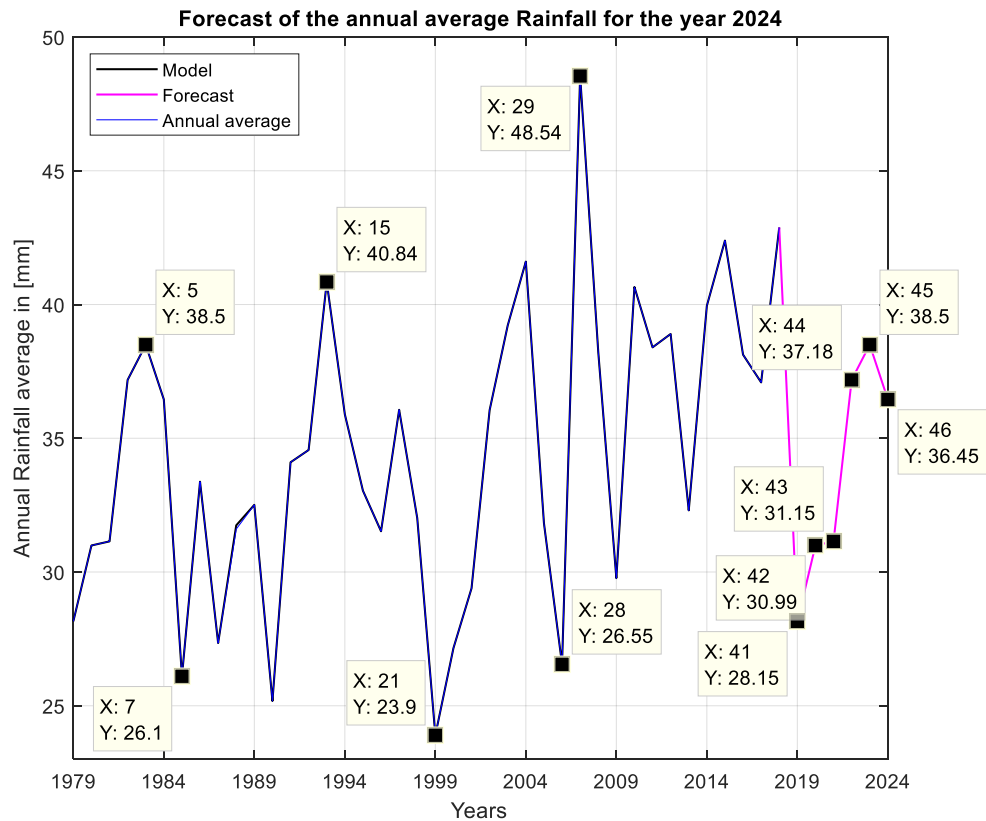


Figure 10: Rainfall prediction curve for 2024

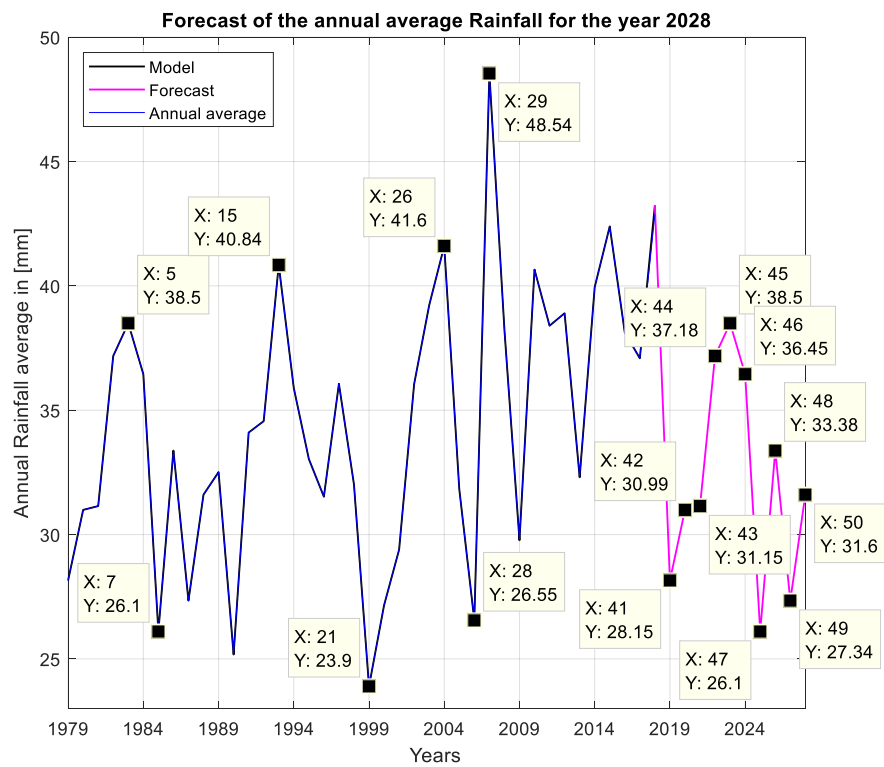


Figure 11: Rainfall prediction curve for 2028

Table 3: Forecast of the annual average rainfall by the Neuro-fuzzy method

Years of the forecast	Values of the annual average rainfall in [mm].
2019	28.15
2020	30.99
2021	31.15
2022	37.18
2023	38.50
2024	36.45
2025	26.10
2026	33.38
2027	27.34
2028	31.60

When analysing the curves, the average rainfall values range from 23.90 mm to 48.54 mm. The minimum value is 23.90 mm (in 1999) and the maximum value is 48.54 mm (in 2007).

IV. Conclusion

In this article, we are interested in the quantitative analysis of daily rainfall from 1979 to 2018 in the Analalava and Port Bergé of Madagascar. This area lies between longitude 47°East and 48°East, latitude 16°South and 15°South. To study the predictability of these parameters, it is necessary to make a quantitative study of some climatological parameters. In our case, we proceeded by using statistical methods, the Neuro-fuzzy method.

According to the Neuro-fuzzy method, the models used for the average rainfall values range from 23.90 mm to 48.54 mm. The year 1999 is the least rainy year, the average rainfall value is 23.90 mm. The most rainy year is 2007 with an average rainfall value of 48.58 mm.

This method led us to model the average rainfall values for the years 2019 to 2028 in Table 3.

V. References

- [1] IPCC (2012) *Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation* (CB Field, V Barros, TF Stocker, *et al.*, Eds.). Cambridge University Press, Cambridge, United Kingdom.
- [2] Jentsch A, Kreyling J, Beierkuhnlein C (2007) A new generation of climate-change experiments_: events, not trends. *Frontiers in Ecology and the Environment*, 5, 365–374.
- [3] Beier C, Beierkuhnlein C, Wohlgemuth T, *et al.* (2012) Precipitation manipulation experiments - challenges and recommendations for the future. *Ecology Letters*, 15, 899–911.
- [4] B. Kosko, *Neural Networks and Fuzzy Systems: A Dynamical Systems Approach to Machine Intelligence*, Prentice Hall, Englewood Cliffs, New Jersey, 1992. 54.
- [5] H. Nomura, I. Hayashi and N. Wakami, A Learning Method of Fuzzy Inference Systems by Descent Method, In *Proceedings of the First IEEE International conference on Fuzzy Systems*, San Diego, USA, pp. 203–210, 1992. 54, 56 .
- [6] W. Pedrycz and H.C. Card, Linguistic Interpretation of Self Organizing Maps, In *Proceedings of the IEEE International Conference on Fuzzy Systems*, San Diego, pp. 371–378, 1992. 54, 55.
- [7] C.T. Lin and C.S.G. Lee, Neural Network based Fuzzy Logic Control and Decision System, *IEEE Transactions on Comput.* (40(12): pp. 1320–1336, 1991. 53, 54, 60, 62, 63.
- [8] D. Nauck and R. Kruse, NEFCON-I: An X-Window Based Simulator for Neural Fuzzy Controllers. In *Proceedings of the IEEE International Conference on Neural Networks*, Orlando, pp. 1638–1643, 1994. 60, 64.

- [9] Jang, J. - S.R., Sun, C. - T., and Mistune, E., 1997, Neuro-Fuzzy and Soft Computing: A Computational Approach to Learning and Machine Intelligence, Prentice Hall, New Jersey.
- [10] Jang, J.-S.R., 1992, Neuro-Fuzzy Modeling: Architectures, analyses, and Applications, Doctoral Dissertation, California: University of California at Berkeley Publisher.
- [11] Jang, Jyh-Shing Roger, 1993, "ANFIS: Adaptive-Network-Based Fuzzy Inference System," IEEE Transactions on Systems, Man, and Cybernetics, 23(3), 665-685.